
MULTIPURPOSE LIME-BASED MORTAR + FINISH

TerraGen™ Adhesive

Origen Paints
NATURAL INTELLIGENCE

Bond · Repair · Base Coat · Finish

INTERIOR + EXTERIOR | TRACE VOC | READY TO USE

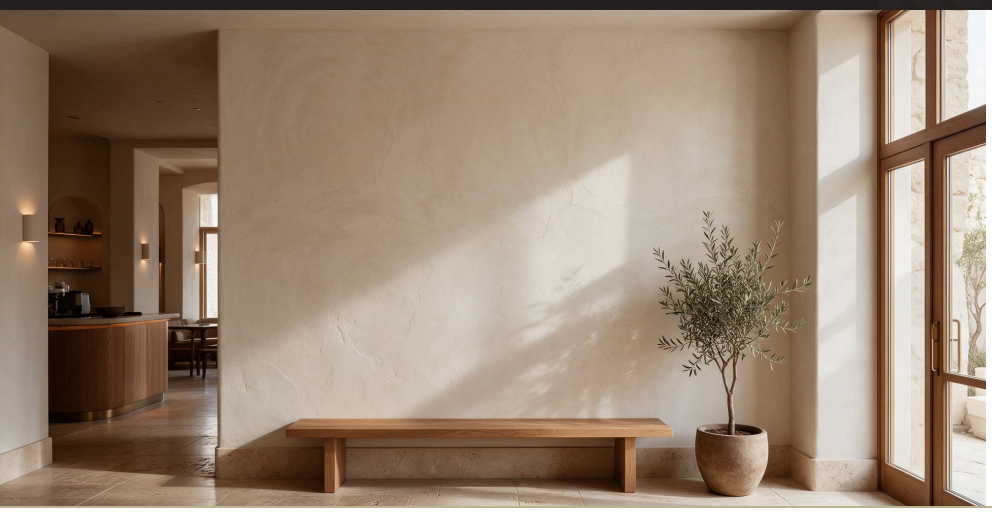



01 ONE MATERIAL. FOUR APPLICATIONS.

One material.
Four applications.

One ready-to-use mineral material for bonding, repairing, base coating and decorative finishing. TerraGen™ Adhesive combines strong adhesion and easy workability with the natural character and breathability of lime. Use it beneath compatible mineral finishes or as the finished surface itself to create a seamless, natural-stone look. Suitable for interior and exterior applications, including new construction, renovation and restoration.

BOND
For compatible tile and approved EIFS applications.

REPAIR
Repair and smooth properly prepared mineral surfaces.

BASE COAT
Create a compatible mineral base beneath decorative finishes.

FINISH
Create seamless, hand-finished mineral surfaces where approved.

Thin-Layer Application
Works from 0.04 to 0.20 in (1–5 mm), without the build of a conventional base mortar.

High Adhesion
Bonds tile, EIFS boards and mineral surfaces, on walls and floors.

Interior + Exterior
New construction, renovation and restoration, including wet areas.

Ready to Use
No mixing of components: open, stir and apply.

RECOAT	SAND / FINISH	FULL CURE	COVERAGE	SIZE
4–6 hr	24 hr	30	37–244	37.5 lb
at 77°F · 60% RH	after application	days	sq ft / pail	(17 kg) pail
keying + second coat	natural-stone look	cures by carbonation	at 0.04–0.20 in (1–5 mm)	ready to use

03 WHERE IT GOES

BOND

Tile + EIFS

Tile on walls and floors, and approved EIFS insulation boards, inside and out.

REPAIR

Mineral Surfaces

Repair and smooth properly prepared brick, concrete, masonry and plaster.

BASE COAT

Beneath Finishes

A compatible mineral base for TerraGen™ and other mineral decorative finishes.

FINISH

Natural-Stone Look

Left as the finished surface for a seamless, hand-finished stone look.

04 READY TO USE

OPEN · MIX · APPLY

Mix thoroughly until uniform. Do not dilute. TerraGen™ Adhesive cures naturally through carbonation.

05 NATURALLY MINERAL

THE TECHNOLOGY

An aerial-lime mortar that hardens by absorbing CO_2 from the air, with the high water-vapor permeability of lime. Enhanced with $CaCO_3$™ Technology (Graphene Technology).

06 PROJECT PLANNING

COVERAGE

Approx. 37–244 sq ft per 37.5-lb pail, depending on thickness (0.04–0.20 in / 1–5 mm).

RECOAT

4–6 hr between the keying coat and the second coat, at 77°F / 60% RH.

SAND / FINISH

Natural-stone look: sand after 24 hr. Full cure in 30 days.

SIZE

37.5 lb (17 kg) pail, ready to use. Sand White and Harmony colors.

07 COLOR

Sand White + Harmony Colors

Color becomes part of the design when TerraGen™ Adhesive is left as the exposed decorative surface. The final tone may vary slightly from the selected color.

Sand
WHITE

Harmony
COLOR CARD

TECHNICAL + SAFETY INFORMATION

Everything you need for a successful project.

See the current TDS and SDS for complete application, handling and safety information. Scan for the TerraGen™ Adhesive Technical Data Sheet and Application Guide.

origenpaints.com/tds/terragen-adhesive

ORDERS@ORIGENPAINTS.COM · PRODUCT SUPPORT: SUPPORT@ORIGENPAINTS.COM

Technical values are guidelines based on laboratory testing and field experience and do not constitute a binding warranty. Verify suitability for each project. Data source: TerraGen™ Adhesive Technical Data Sheet and the manufacturer (30.09.2026). Coverage varies with thickness, substrate and use. Photography is illustrative. A jobsite sample is recommended before full application.